

DataSheet

Pneumatic Impacting Vibrator



ProSpare

The V1 Pneumatic Impacting Vibrator has been produced to suit a wide range of requirements. It can be installed on hoppers, chutes, concrete block making machines or shuttering and offers low maintenance down-time and trouble free operation.



Ensure air supply is filtered and lubricated. Use 1/4" bore hose.

If it is not connected to an automatic filter / lubrication, pour 5ml of recommended oil (Tellus R10 or equivalent) into the inlet port every 8 hours.

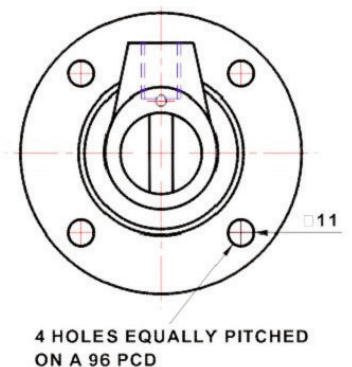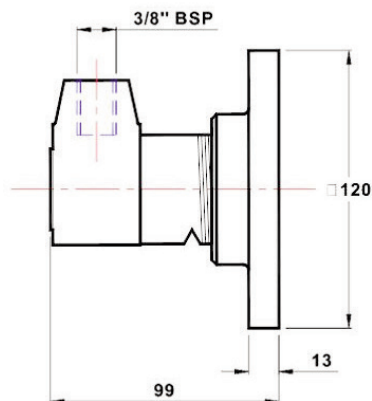

Model	Piston Dia. mm	Stroke mm	Height mm	Fixing bolts	Impacts per min	Working Pressure	Weight kgs
V1	28.5	25.4	99	M10	4000	6 Bar	2.04

On request can be supplied with ATEX certification
to **ATEX 95 95/9/EC**  **II 2 G & D Zone 2 & 22**

ProSpare

Bestwood Road • Pinxton • Nottinghamshire NG16 6NT
Tel • +44 (0)1773 814008 • Fax • +44 (0)1773 860055 • Email • sales@prospare.co.uk

prospare.co.uk

We reserve the right to modify or withdraw specifications or products without notice or obligation.